




BOASolaris



SOLAR
LIGHTING

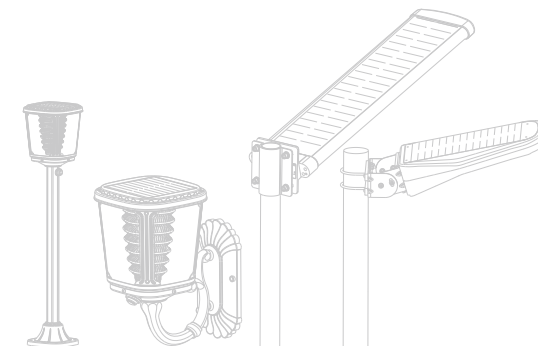

BOASolaris

Company Name : BOASolaris Enterprise
Address : Regimanuel Estates I-16 , Sakumono Tema.
Email : Info@boasolaris.com or anane.boasiako@boasolaris.com
Website : www.boasolaris.com
Telephone Number: +233 50 734 3083
+233 55 384 2336
+49 175 16 55 456 (Germany)
Whatsup : +233 50 734 383
Facebook : [@boasolaris.com](https://www.facebook.com/boasolaris.com)



SOLAR
LIGHTING



PRODUCT RANGE

Hot and Classic Series

- SSL Series
- TITANS Series
- HONOR Series
- Street Light Series
- Garden Light Series
- Wall Light Series
- Wall Washer Light Series



TITANS SERIES

The Brightest Star in The Sky

There is always A best angle to get the most effective sunlight

Solar our Life.




SSL-28|27|26|25|24|23|22



TITANS SERIES

TITANS SERIES SOLAR STREET LIGHT

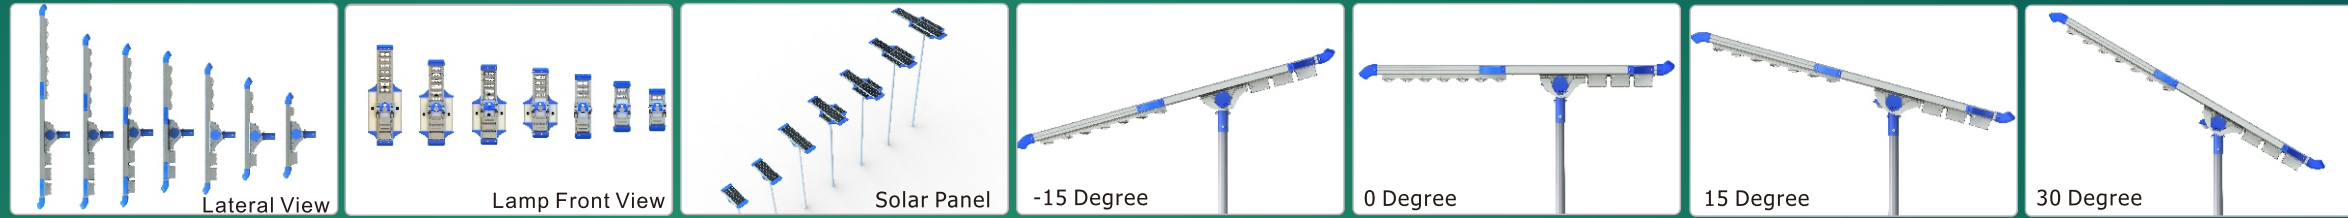

-15,0,15,30 Four-degree angle to confirm the most effective charging efficiency. Professional Lighting distribution can keep the same angle while the Solar Panel angle changing.




Professional Fresnel lens to achieve 20 m and 120 degree detectable area, far more than the competitor



Aircraft Carrier design to enlarge the solar panel and battery. Provide a longer lighting time



Street, Courtyard, Garden, Park, Roadway, pathway, Parking Lot, Campus, Farm & Ranch, Military Base

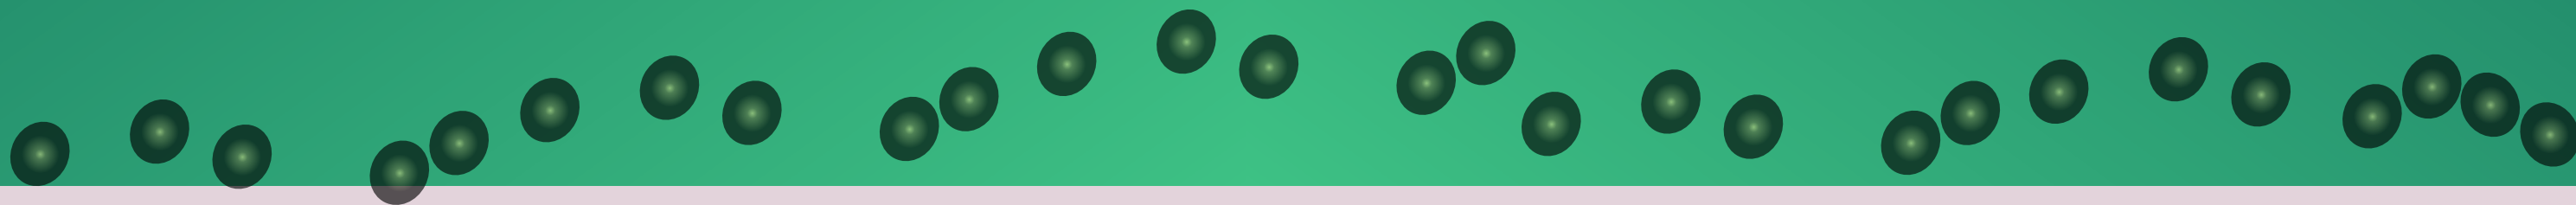

HONOR

AS TIME GOES BY, ONLY THE
CLASSIC FOREVER

SERIES

ALWAYS HERE


- SLL-10 Series
- SLL-11 Series
- SLL-18 Series



You are right! It's solar light with invisible solar panel!

TITANS SERIES Remote Control Solar Street Light

Different Angle and High efficiency Charge,
Never Affected by the Installation Position.

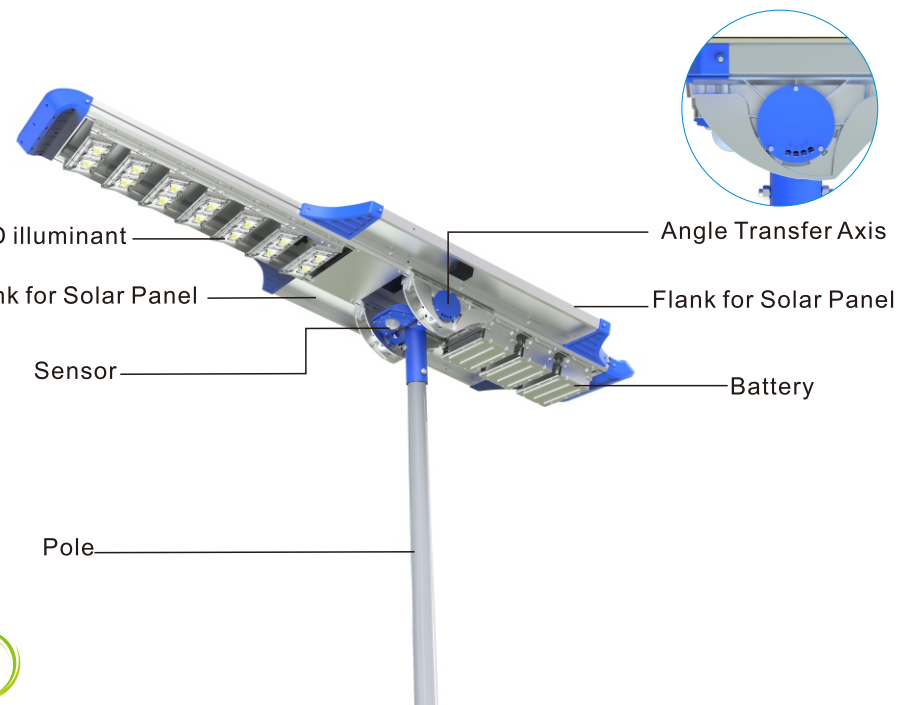

Model	SSL-22	SSL-23	SSL-24	SSL-25	SSL-26	SSL-27	SSL-28
LED	2000Lumens	3000Lumens	4000Lumens	5000Lumens	6000Lumens	7000Lumens	8000Lumens
Solar Panel	Polycrystalline Silicon	Polycrystalline Silicon	Polycrystalline Silicon	Polycrystalline Silicon	Polycrystalline Silicon	Polycrystalline Silicon	Polycrystalline Silicon
Battery Type	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery
Solar Charging Time	9-10 hours by bright sunlight	9-10 hours by bright sunlight	9-10 hours by bright sunlight	9-10 hours by bright sunlight	10 hours by bright sunlight	10 hours by bright sunlight	10 hours by bright sunlight
Lighting Time	3 Nights after fully Charged	3 Nights after fully Charged	3 Nights after fully Charged	3 Nights after fully Charged	3 Nights after fully Charged	3 Nights after fully Charged	3 Nights after fully Charged
Lighting Mode	RemoteControl for Brightness and Winter/SummerMode Selection	RemoteControl for Brightness and Winter/SummerMode Selection	RemoteControl for Brightness and Winter/SummerMode Selection	RemoteControl for Brightness and Winter/SummerMode Selection	RemoteControl for Brightness and Winter/SummerMode Selection	RemoteControl for Brightness and Winter/SummerMode Selection	Remote Control for Brightness and Winter/SummerMode Selection
Material	Aluminumalloy + PC	Aluminumalloy + PC	Aluminumalloy + PC	Aluminumalloy + PC	Aluminumalloy + PC	Aluminumalloy + PC	Aluminumalloy + PC
Waterproof	IP65	IP65	IP65	IP65	IP65	IP65	IP65
Work Temperature	Charging Temperate: 0~45° ,Discharging Temperate: -20°~60°,Storage Temperate: 0~45°						
Product Size	1116*421*355mm	1530*421*355mm	1770*421*355mm	1687*810*355mm	1875*810*355mm	2126*810*355mm	2258*810*355mm
Application	Street,Courtyard,Garden, Park,Roadway,pathway,Parking Lot,Campus,Farm & Ranch,Military Base						

SLL-10 SERIES

HONOR SERIES SOLAR LANDSCAPE LIGHT




2.5M

3M

3M

3-3.5M

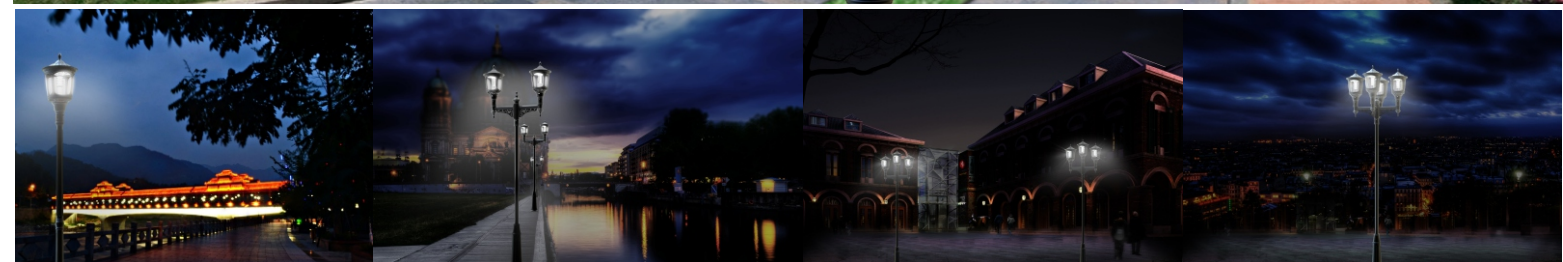


Model	SLL-10	SLL-10-1 Multi-Lamp
LED	2000 Lumens	N*2000 Lumens
Solar Panel	Polycrystalline Silicon	Polycrystalline Silicon
Battery Type	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery
Solar Charging Time	5-6 hours by bright sunlight	5-6 hours by bright sunlight
Lighting Time	3 Nights after fully Charged	3 Nights after fully Charged
Lighting Mode	5H 25%+5H 10% , PIR Sensors 100% 30S	5H 25%+5H 10% ,PIR Sensors 100% 30S Multi Wireless sync control
Material	Aluminumalloy + PC	Aluminumalloy + PC
Waterproof	IP65	IP65
Work Temperature	Charging Temperature: 0~45° ,Discharging Temperature: -20°~60° Storage Temperature: 0~45°	
Product Size	Φ416*830mm	Φ 416*830mm
Application	Garden, Gate, Fence, Courtyard, Road, Park, Pathway etc	

3 2.5M -3M- 3.5M is the Recommended installation height

4

SLL-11 SERIES



HONOR SERIES SOLAR LANDSCAPE LIGHT



2.5M



3M



3M



3-3.5M



Model	SLL-11	SLL-11-1 Multi-Lamp
LED	2000 Lumens	N*2000 Lumens
Solar Panel	Polycrystalline Silicon	Polycrystalline Silicon
Battery Type	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery
Solar Charging Time	5-6 hours by bright sunlight	5-6 hours by bright sunlight
Lighting Time	3 Nights after fully Charged	3 Nights after fully Charged
Lighting Mode	5H 25%+5H 10% , PIR Sensors 100% 30S	5H 25%+5H 10% ,PIR Sensors 100% 30S Multi Wireless sync control
Material	Aluminumalloy + PC	Aluminumalloy + PC
Waterproof	IP65	IP65
Work Temperature	Charging Temperature: 0~45° ,Discharging Temperature: -20°~60° Storage Temperature: 0~45°	
Product Size	Φ416*808mm	Φ416*808mm
Application	Garden, Gate, Fence, Courtyard, Road, Park, Pathway etc	

SLL-18 SERIES



**NEW PRODUCT
COMING SOON**

SOLAR LANDSCAPE LIGHT



Model	SLL-18-Single Lamp	SLL-18-1-Multi-Lamp
LED	1000 Lumens	N*1000 Lumens
Solar Panel	Polycrystalline Silicon	Polycrystalline Silicon
Battery Type	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery
Solar Charging Time	9-10hours by bright sunlight	9-10hours by bright sunlight
Lighting Time	3 Nights after fully Charged	3 Nights after fully Charged
Lighting Mode	5H 25%+5H 10% , PIR Sensors 100% 30S	5H 25%+5H 10% ,PIR Sensors 100% 30S Multi Wireless sync control
Material	Aluminum alloy + PC	Aluminum alloy + PC
Waterproof	IP65	IP65
Work Temperature	Charging Temperate: 0~45° Discharging Temperate: -20°~60° Storage Temperate: 0~45°	
Product Size	∅280*620	∅280*620
Application	Garden, Gate, Fence, Courtyard, Road, Park, Pathway etc	Garden, Gate, Fence, Courtyard, Road, Park, Pathway etc

SSL-06R/07R/08R



**Upgrade
Product**

Remote Control Solar Street Light --Make You Feel the World is So Bright



Model	SSL-06R	SSL-07R	SSL-08R
LED	3000 Lumens	4500 Lumens	6000 Lumens
Solar Panel	Polycrystalline Silicon	Polycrystalline Silicon	Polycrystalline Silicon
Battery Type	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery
Solar Charging Time	9-10 hours by bright sunlight	9-10 hours by bright sunlight	10 hours by bright sunlight
Lighting Time	3 Nights after fully Charged	3 Nights after fully Charged	3 Nights after fully Charged
Lighting Mode	RemoteControl+Time Control+PIR Motion Sensor	RemoteControl+Time Control+PIR Motion Sensor	RemoteControl+Time Control+PIR Motion Sensor
Material	Aluminumalloy + PC	Aluminumalloy + PC	Aluminumalloy + PC
Waterproof	IP65	IP65	IP65
Work Temperature	Charging Temperate: 0~45° Discharging Temperate: -20°~60° Storage Temperate: 0~45°		
Product Size	773*225*287mm	1043*225*287mm	1511*225*616mm
Application	Street, Courtyard, Garden, Park, Roadway, pathway, Parking Lot, Campus, Farm & Ranch, Military Base.		

Solar Street Light Series



SSL-01/02/03/04/05



All In One Solar Street Courtyard Light

--The Fashion, the Whole World Deserve It.




Specification					
Model	SSL-01	SSL-02	SSL-03	SSL-04	SSL-05
LED	1000Lumens	2000Lumens	3000Lumens	5000Lumens	8000Lumens
Battery Type	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion battery	Rechargeable Li-ion battery
Solar Panel	Monocrystalline silicon	Monocrystalline silicon	Monocrystalline silicon	Monocrystalline silicon	Monocrystalline silicon
Install height	2.5~3meters	3~4 meters	4~5 meters	4~6M	6~8M
Solar charging time	11 hours by bright sunlight	9~10 hours by bright sunlight	9~10 hours by bright sunlight	10 hours by bright sunlight	10~11 hours by bright sunlight
Lighting time	3 nights	3 nights	3 nights	Over 3 nights	Over 3 nights
Lighting mode	300 lumens for first 5 hrs +150 lumens DIM light with PIR 1000 lumens full brightness till dawn	600 lumens for first 5 hrs + 300 lumens DIM light with PIR 2000 lumens full brightness till dawn	500 lumens DIM light with PIR 3000 lumens full brightness till dawn	750 lumens DIM light with PIR 5000 lumens full brightness till dawn	1000 lumens DIM light with PIR 8000 lumens full brightness till dawn
Waterproof	IP 65	IP 65	IP 65	IP65	IP65
Material	Aluminum alloy + steel glass	Aluminum alloy + steel glass	Aluminum alloy + steel glass	Aluminum alloy + toughened glass	Aluminum alloy + toughened glass
Size	505*227*164mm	808*227*164mm	1098*227*164mm	1553*420.5*224.5mm	1933*420.5*224.5 mm
Work temperature	Charging Temperate: 0~45° ,Discharging Temperate: -20°~60° ,Storage Temperate: 0~45°				
Application	Street,Courtyard,Garden,Park, Roadway,Pathway,Parking Lot,Privateroad, Sidewalk,Public square, plaza,Campus,Airfield,Farm & Ranch,Perimeter Security, Wildlife area,Remote Area,Military Base				

ESL-20/30/40




All-in-One Solar street LED light

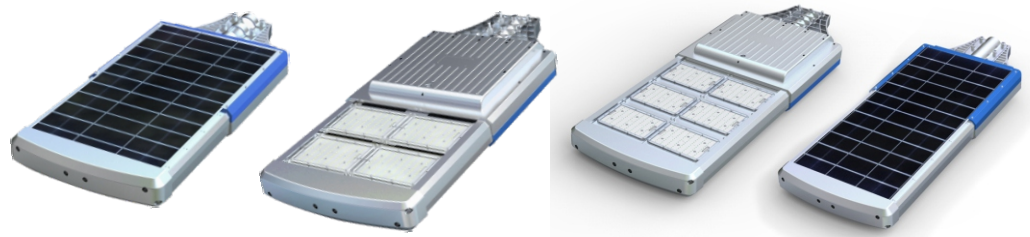

ESL-20

ESL-30


ESL-40



Specification			
Model	ESL-20	ESL-30	ESL-40
LED	2000Lumens	3000Lumens	4000Lumens
Battery Type	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery
Solar Panel	Monocrystalline silicon	Monocrystalline silicon	Monocrystalline silicon
Install height	4~5 meters	4~6 meters	6~8 meters
Solar charging time	12 hours by bright sunlight	10 hours by bright sunlight	10~11 hours by bright sunlight
Lighting time	3 nights	3 nights	3 nights
Lighting mode	5Hrs 100% light+ 25% light till dawn	5Hrs 100% light+ 25% light till dawn	5Hrs 100% light+ 25% light till dawn
Waterproof	IP 65	IP 65	IP 65
Material	Aluminum alloy + steel glass	Aluminum alloy + steel glass	Aluminum alloy + steel glass
Size	1092*488*117mm	1092*488*117mm	1308*488*117mm
Work temperature	Charging Temperate: 0~45° ,Discharging Temperate: -20°~60° ,Storage Temperate: 0~45°		
Application	Street, Government project, Garden, Courtyard, Roadway, Pathway, Public square, Campus, Parking lot		



Solar Plaza Light Series

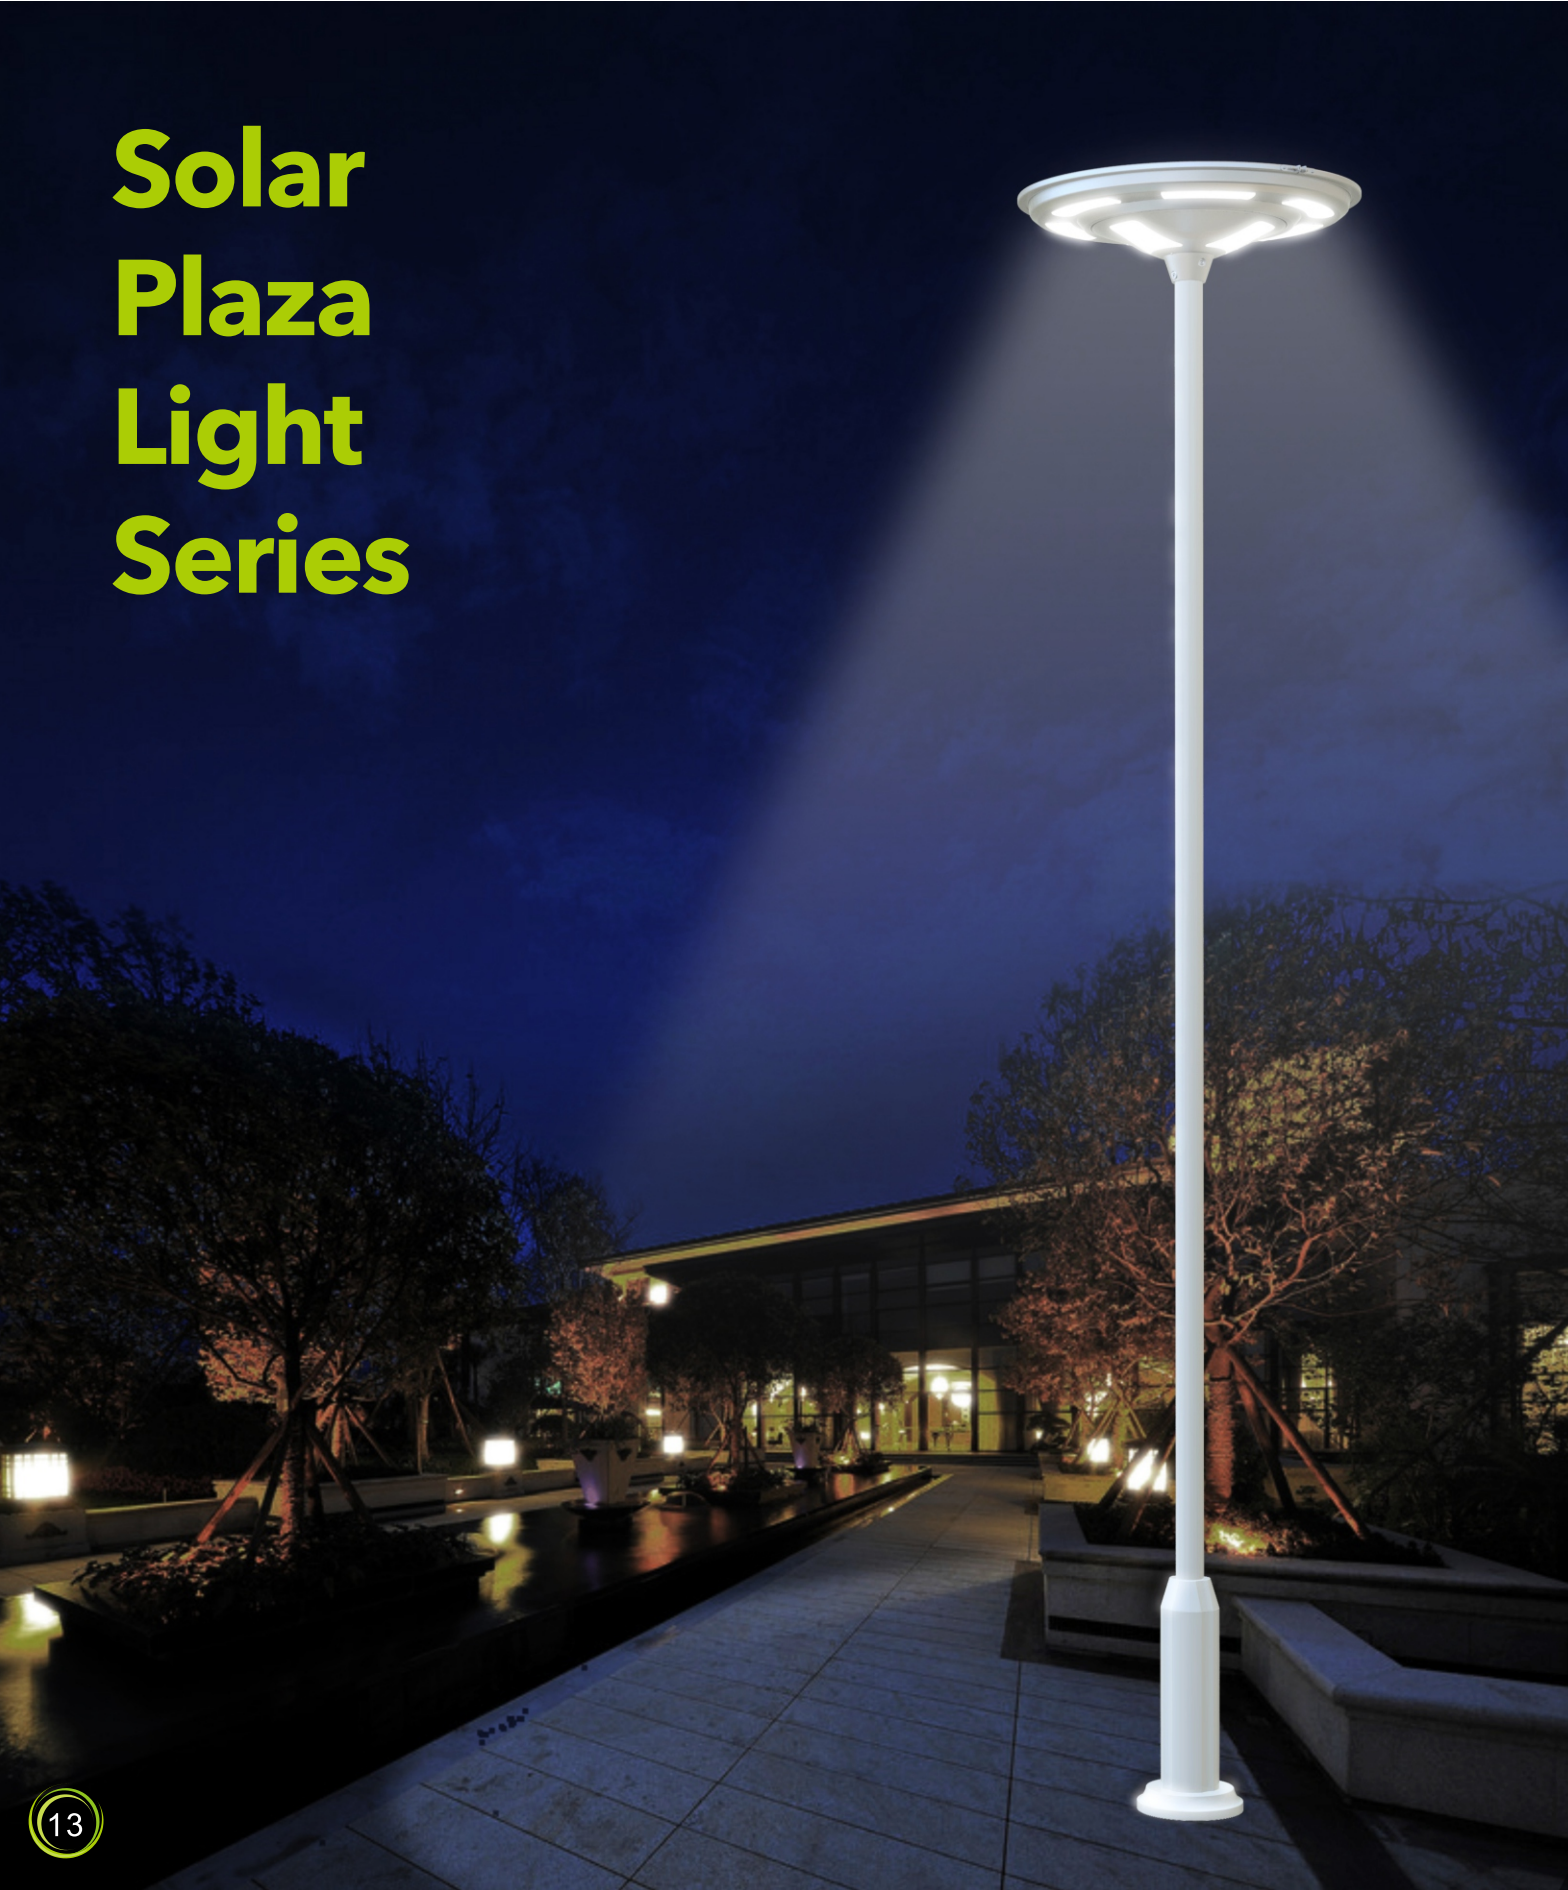

ESL-04/14/24



Solar plaza light

--Best Choice for Landscape Project



Specification			
Model	ESL-04	ESL-14	ESL-24
LED	900Lumens	1500Lumens	3000Lumens
Battery Type	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery
Solar Panel	Monocrystalline silicon	Monocrystalline silicon	Monocrystalline silicon
Install height	3~4 meters	3~5 meters	4~6 meters
Solar charging time	9~10 hours by bright sunlight	10 hours by bright sunlight	11 hours by bright sunlight
Lighting time	3 nights	3 nights	3 nights
Lighting mode	5Hrs 100% light+ 25% light till dawn	5Hrs 100% light+ 25% light till dawn	5Hrs 100% light+ 25% light till dawn
Waterproof	IP 65	IP 65	IP 65
Material	Aluminum alloy+ABS	Aluminum alloy+ABS	Aluminum alloy+ABS
Size	525*525*161mm	690*727*223 mm	935*905*234mm
Work temperature	Charging Temperature: 0~45° ,Discharging Temperature: -20°~60° ,Storage Temperature: 0~45°		
Application	Courtyard, Garden, Park, Street, Roadway, Pathway, Parking, Lot, Private road, Sidewalk, Public square, Plaza, Campus, Airfield, Farm , Ranch, Perimeter Security, Wildlife area, Remote Area, Military Base		

Professional Lighting Distribution for Government Project


SCL-01



Remote controller Solar Courtyard Light +



Specification	
LED	1000Lumens
Solar panel	Polycrystalline Silicon
Battery Type	Rechargeable Li-ion Battery
Solar charging time	9-10 Hrs by bright sunlight
Lighting time	3 Nights after fully Charged
Lighting mode	15%-50%-100% by PIR and controller
Material	Aluminum alloy + PC
Waterproof	IP65
Work temperature	Charging Temperature: 0~45° ,Discharging Temperature: -20°~60° ,Storage Temperature: 0~45°
Product size	446*247*86mm
Application	Garden, Courtyard

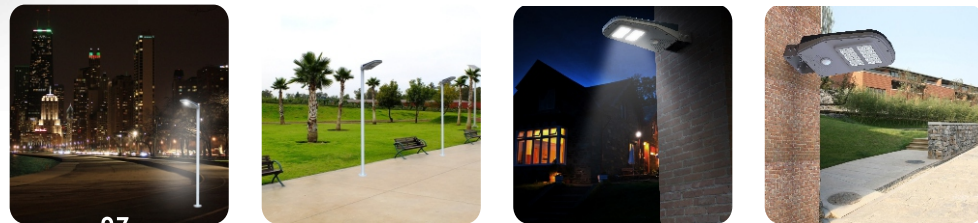

UPGRADE PRODUCTS

SLL-09/SDL-01



Solar Landscape Light



Specification		
Model	SLL-09	SDL-01
LED	2500lumens*3	2500lumens
Solar panel	Monocrystalline silicon	Monocrystalline silicon
Battery Type	Li-ion rechargeable battery	Li-ion rechargeable battery
Solar charging time	5-6 hours by bright sunlight	5-6 hours by bright sunlight
Lighting time	3 nights	3 nights
Lighting mode	High Bright for 10 Hours per Night	High Bright for 10 Hours per Night
Material	Aluminum + ABS	Aluminum + ABS
Install height	3~6 meters	3 meters
Waterproof	IP 65	IP 65
Work temperature	Charging Temperature: 0~45° ,Discharging Temperature: -20°~60° ,Storage Temperature: 0~45°	
Product size	1294*1182*333mm	752*459*153mm
Application	Courtyard,Garden, Park,Street,Roadway,pathway,Parking Lot,Private road, Sidewalk,Public square,plaza,Campus,Airfield,Farm & Ranch,Perimeter Security,Wildlife area,Remote Area,Military Base	

SLL-06



Solar Landscape Light



Specification	
LED	1000Lumens
Solar panel	Monocrystalline silicon
Battery Type	Li-ion rechargeable battery
Solar charging time	10 hours by bright sunlight
Lighting time	3 nights
Lighting mode	5Hrs 100% light+25% light till dawn
Material	Aluminum alloy + PC
Waterproof	IP65
Work temperature	Charging Temperature: 0~45° ,Discharging Temperature: -20°~60° ,Storage Temperature: 0~45°
Product size	512*512*482mm
Application	Plaza, Public Square, Courtyard, Garden, Park, Street, Roadway, pathway, Parking Lot, Private road, Sidewalk, Campus, Airfield, Farm & Ranch



Solar Garden Light Series




SGL-05/SCL-02

Solar Garden Light

--Life itself can be So Romantic



Specification

LED	150Lumens	150Lumens 
Solar panel	Polycrystalline Silicon	Polycrystalline Silicon
Battery Type	Rechargeable Li-ion Battery	Rechargeable Li-ion Battery
Solar charging time	7-8 Hrs by bright sunlight	7-8 Hrs by bright sunlight
Lighting time	3 Nights after fully Charged	3 Nights after fully Charged
Lighting mode	5Hrs high brightness + 7 Hrs dim light	5Hrs high brightness + 7 Hrs dim light
Material	Aluminum alloy + PC	Aluminum alloy + PC
Waterproof	IP65	IP65
Work temperature	Charging Temperature: 0~45°, Discharging Temperature: -20°~60°, Storage Temperature: 0~45°	
Product size	320*320*818mm	320*320*1496mm
Application	Garden, Courtyard, Road, Park, Street, Pathway	

SLL-07     

Solar Landscape Light



Specification	
LED	1200Lumens
Solar panel	Polycrystalline Silicon
Battery Type	Rechargeable Li-ion Battery
Solar charging time	12 hours by bright sunlight
Lighting time	3 Nights after fully Charged
Lighting mode	DIM lighting + Sensor for Bright Light
Material	Aluminum alloy + PC
Waterproof	IP65
Work temperature	Charging Temperate: 0~45° ,Discharging Temperate: -20°~60° ,Storage Temperate: 0~45°
Product size	330*330*529mm
Application	Garden, Courtyard, Road, Park, Street, Pathway



SGL-01/02     

European-style Solar Garden Light



Specification		
Model	SGL-01	SGL-02
LED	100Lumens	200Lumens
Battery Type	Rechargeable Li-ion battery	Rechargeable Li-ion battery
Solar panel	Monocrystalline silicon	Monocrystalline silicon
Solar charging time	7~8 hours by bright sunlight	7~8 hours by bright sunlight
Lighting time	3 nights after fully charged	3 nights after fully charged
Lighting mode	High brightness for whole night	DIM lighting + PIR motion Sensor for Bright Lighting
Material	Aluminum+PC	Aluminum+PC
Waterproof	IP65	IP65
Work temperature	Charging Temperate: 0~45° ,Discharging Temperate: -20°~60° ,Storage Temperate: 0~45°	
Product size	176 *176 *277mm	176 *176 *802mm
Application	Garden, Courtyard, Road, Park, Hotel, Pathway etc	

SDL-02     

Solar Garden Light




Specification	
LED	20Lumens
Solar panel	Polycrystalline Silicon
Battery Type	Rechargeable Li-ion Battery
Solar charging time	9-10Hrs by bright sunlight
Lighting time	3 Nights after fully Charged
Lighting mode	High Light for 8 Hours Per Night
Material	Aluminum alloy + PC
Waterproof	IP65
Work temperature	Charging Temperate: 0~45° ,Discharging Temperate: -20°~60° ,Storage Temperate: 0~45°
Product size	Diameter 124mm, Pole:620mm
Application	Garden, Courtyard, Park,lawn , Swimming pool



SGL-03/04     

European-style Solar Garden Light

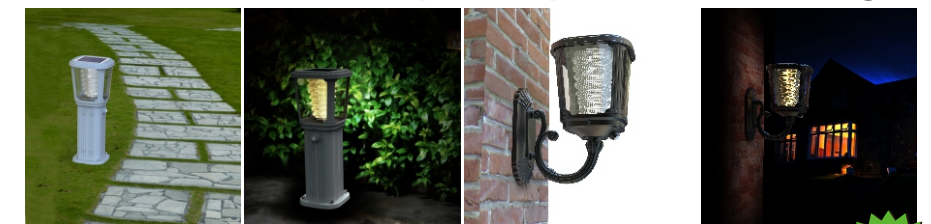

Specification		
Model	SGL-03	SGL-04
LED	200Lumens	200Lumens
Battery Type	Rechargeable Li-ion battery	Rechargeable Li-ion battery
Solar panel	Monocrystalline silicon	Monocrystalline silicon
Solar charging time	7~8 hours by bright sunlight	7~8 hours by bright sunlight
Lighting time	3 nights after fully charged	3 nights after fully charged
Lighting mode	DIM lighting + PIR motion Sensor for Bright Lighting	DIM lighting + PIR motion Sensor for Bright Lighting
Material	Aluminum+PC	Aluminum+PC
Waterproof	IP65	IP65
Work temperature	Charging Temperate: 0~45° ,Discharging Temperate: -20°~60° ,Storage Temperate: 0~45°	
Product size	176 *176 *438mm	250 *176 *298mm
Application	Garden, Courtyard, Road, Park, Hotel, Pathway etc	

ESL-15/25



Solar Garden Light



Specification		
Model	ESL-15	ESL-25
LED	100Lumens	100Lumens
Solar panel	Monocrystalline silicon	Monocrystalline silicon
Battery Type	Li-ion rechargeable battery	Li-ion rechargeable battery
Solar charging time	7~8 hours by bright sunlight	7~8 hours by bright sunlight
Lighting time	Around 3 nights	Around 3 nights
Lighting mode	5Hrs high brightness + 7Hrs dim light	5Hrs high brightness + 7Hrs dim light
Material	Aluminum alloy+ABS+PC	Aluminum alloy+ABS+PC
Waterproof	IP65	IP65
Work temperature	Charging Temperate: 0~45°, Discharging Temperate: -20°~60°, Storage Temperate: 0~45°	
Product size	160*160*264mm	160*160*800mm
Application	Garden, Courtyard, Road, Park, Street, Pathway	



ESL-21



Integrated Solar motion light



Specification	
LED	700Lumens
Solar panel	Monocrystalline silicon, 17% efficiency
Battery Type	Li-ion rechargeable battery
Solar charging time	7~8 hours by bright sunlight
Lighting time	3 nights
Lighting mode	70 lumens Dim Warm lighting +motion sensor (700 lumens Pure white Bright lighting 30secs when people move through the light)
Material	Aluminum alloy+ABS
Install height	2.5~3.5M
Waterproof	IP65
Work temperature	Charging Temperate: 0~45°, Discharging Temperate: -20°~60°, Storage Temperate: 0~45°
Product size	282*185*205mm
Application	Courtyard, Garden, Park, Street, Roadway, pathway, Parking Lot, Private road, Sidewalk, Public square, plaza, Campus, Airfield, Farm & Ranch, Perimeter Security, Wildlife area, Remote Area, Military Base



SLL-05/SLL-15



Solar underground light



Specification		
Model	SLL-05	SLL-15
LED	30Lumens	30Lumens
Solar panel	Monocrystalline silicon	Monocrystalline silicon
Battery Type	Li-ion rechargeable battery	Li-ion rechargeable battery
Solar charging time	11 hours by bright sunlight	11 hours by bright sunlight
Lighting time	3 nights after fully charged	3 nights after fully charged
Lighting mode	First 5 hours white color light, when something pass by above the lamp (distance 0-50CM), it will turn to blue color for 5-10 second. After the first 5 hours, color switch sensor will turn off automatically and the lamp keep white color in 50% DIM light. After 10 hours lighting, the lamp will be off automatically.	10 Hours 30 lumens
Material	Stainless steel and aluminum	Stainless steel and aluminum
Waterproof	IP68	IP68
Work temperature	Charging Temperate: 0~45°, Discharging Temperate: -20°~60°, Storage Temperate: 0~45°	
Product size	Φ170*55mm	Φ170*55mm
Application	Plaza, Park, Garden, Street, Walkway, Bank of swimming pool etc.	

ESL-32



Solar Motion Light Both for Warm and Pure White



Warm White



Warm White

Specification	
Model	ESL-32
LED	400Lumens
Solar panel	Monocrystalline silicon
Battery Type	Li-ion rechargeable battery
Solar charging time	11 hours by bright sunlight
Lighting time	Over 3 nights
Lighting mode	1. 20 lumens Dim lighting +motion sensor (Bright lighting 400 lumens for 30secs when people move through the light) 2. Press the button to change the lighting mode between Pure white and Warm white. Both for lighting and decoration purpose
Material	ABS+PC
Waterproof	IP65
Work temperature	Charging Temperate: 0~45°, Discharging Temperate: -20°~60°, Storage Temperate: 0~45°
Install height	2.5~3.5M
Product size	131*234*101mm
Application	Wall, Step, Road, Garden, Park, Square, Street, Pathway etc


SML-02



Solar Motion Light with Warm White and Pure White Light



Specification	
LED	200Lumens
Solar panel	Monocrystalline silicon
Battery Type	Li-ion rechargeable battery
Solar charging time	12 hours by bright sunlight
Lighting time	Over 3 nights
Lighting mode	Warm White Dim Lighting +Motion Sensor for Bright Pure White Lighting
Material	ABS+PC
Install height	2~3M
Waterproof	IP65
Work temperature	Charging Temperature: 0~45° ,Discharging Temperature: -20°~60° ,Storage Temperature: 0~45°
Product size	N/A
Application	Garden, Courtyard, Road,Park, Street,Pathway

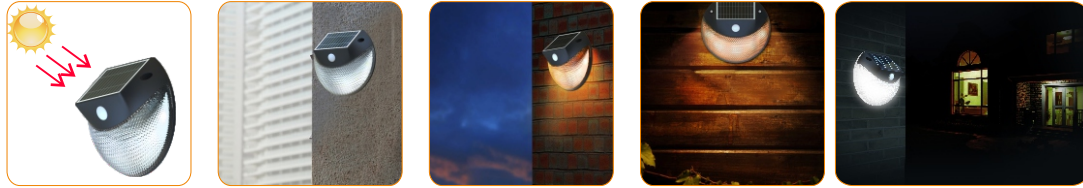

SML-01/SML-01T



Remote Control Solar PIR Security Light



Specification		
Model	SML-01	SML-01T
LED	1000Lumens	1000Lumens
Solar panel	Monocrystalline silicon, 17% efficiency	Monocrystalline silicon, 17% efficiency
Battery Type	Li-ion rechargeable battery	Li-ion rechargeable battery
Solar charging time	11 hours by bright sunlight	11 hours by bright sunlight
Lighting time	More than 5 nights	More than 5 nights
Lighting mode	Dark/DIM/Bright	Dark/DIM/Bright
Material	Aluminum alloy+toughened glass	Aluminum alloy+toughened glass
Install height	2.5~3.5M	2.5~3.5M
Waterproof	IP65	IP65
Work temperature	Charging Temperature: 0~45° ,Discharging Temperature: -20°~60° ,Storage Temperature: 0~45°	Charging Temperature: 0~45° ,Discharging Temperature: -20°~60° ,Storage Temperature: 0~45°
Product size	242.5*120.5*92mm	242.5*120.5*92mm
Application	Warehouse,Garden, park, courtyard,community, building,Wall ,etc	



SML-03



Multifunctional Solar Motion Light with Torch Light



Specification	
LED	Wall light: 300lumens, Torch light: 100lumens
Solar panel	Monocrystalline silicon
Battery Type	Li-ion rechargeable battery
Solar charging time	12 hours by bright sunlight
Lighting time	3 Nights
Lighting mode	1. Portable torch light: Users can use the lamp as torch light or table light if need. 2. Wall light:Dim light (warm white) + PIR for 100%brightness(pure white) for 30 seconds
Material	ABS; transparent PC
Waterproof	IP65
Work temperature	Charging Temperature: 0~45° ,Discharging Temperature: -20°~60° ,Storage Temperature: 0~45°
Install height	2~4 M
Product size	202*118*108mm
Application	Garden, Courtyard, Gate, Road, Park, Street, Pathway

SLL-02



RGB Solar Flood Light




Specification	
LED	3W RGB LED
Solar panel	Monocrystalline silicon
Battery Type	Li-ion rechargeable battery
Solar charging time	8~9 hours by bright sunlight
Lighting time	2 nights
Lighting mode	5 hours 100% brightness and then 3 hours 50%, 8 hours per night. Red,Orange, Yellow,Green,Green Grass,Blue, Purple, Seven Colors Switch
Material	Aluminum alloy+toughened glass
Install height	N/A
Waterproof	IP65
Work temperature	Charging Temperature: 0~45° ,Discharging Temperature: -20°~60° ,Storage Temperature: 0~45°
Product size	242.5*120.5*92mm
Application	Courtyard,Garden, Park,Street,Roadway,pathway,Parking Lot,Private road,Sidewalk,Public square,plaza,Campus,Airfield,Farm & Ranch, Perimeter Security,Wildlife area,Remote Area,Military Base

东桥鸟瞰



Solar Wall Washer Series

Apply to Bridge, Building,
Advertisement Board,
Outdoor Step, Roof,
Fence etc.

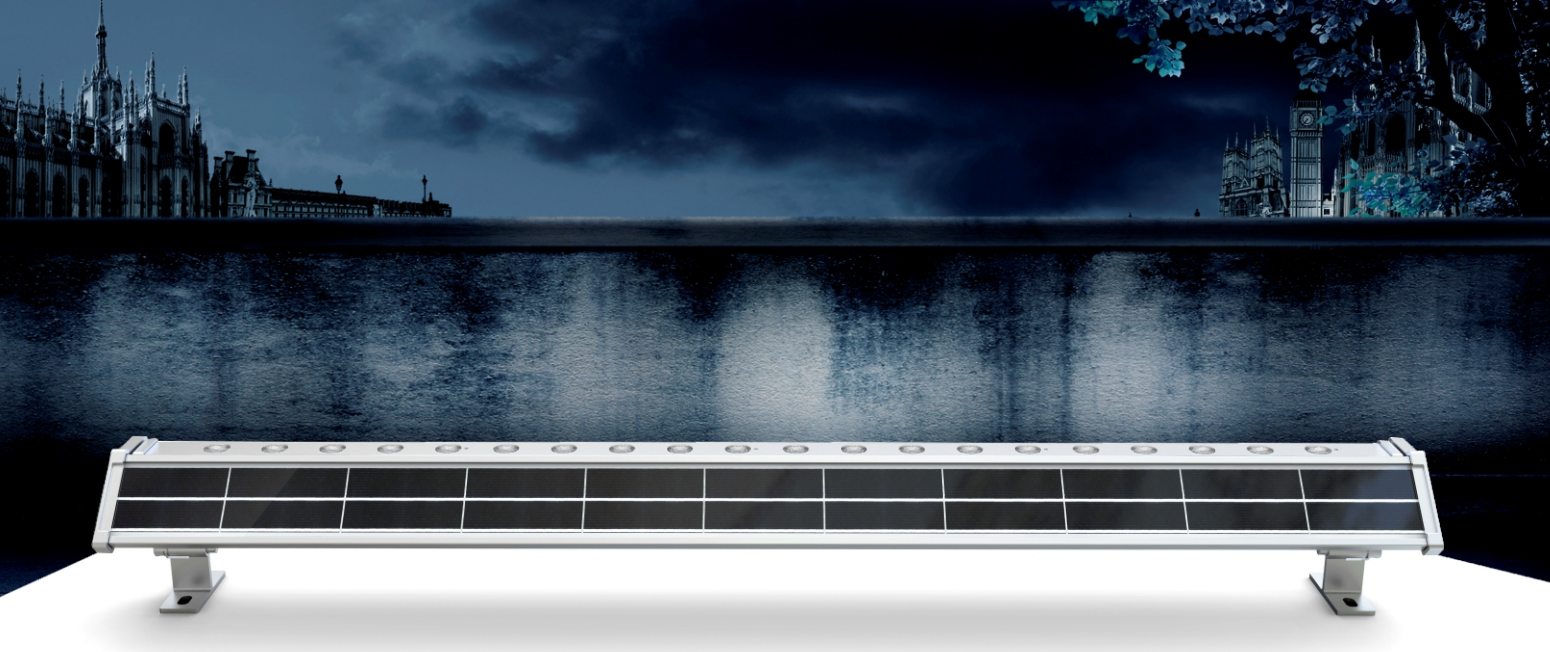

SLL-17




Solar Wall Washer Light



400 LUMENS


Specification	
LED	400 lumens
Solar panel	Polycrystalline Silicon
Battery Type	Rechargeable Li-ion Battery
Solar charging time	6-7 hours by bright sunlight
Lighting time	3 Nights after fully Charged
Lighting mode	5Hrs high brightness + 3 Hrs dim light
Material	Aluminum alloy + PC
Waterproof	IP65
Work temperature	Charging Temperature: 0~45° Discharging Temperature: -20°~60° Storage Temperature: 0~45°
Product size	1022*128*108mm
Application	Garden,Hotel,Overpass, Bridge,Building External Wall , Yard,Square,Pathway,etc

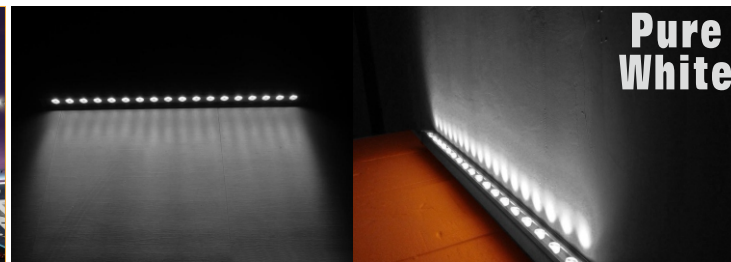

SLL-08




Solar Wall Washer Light

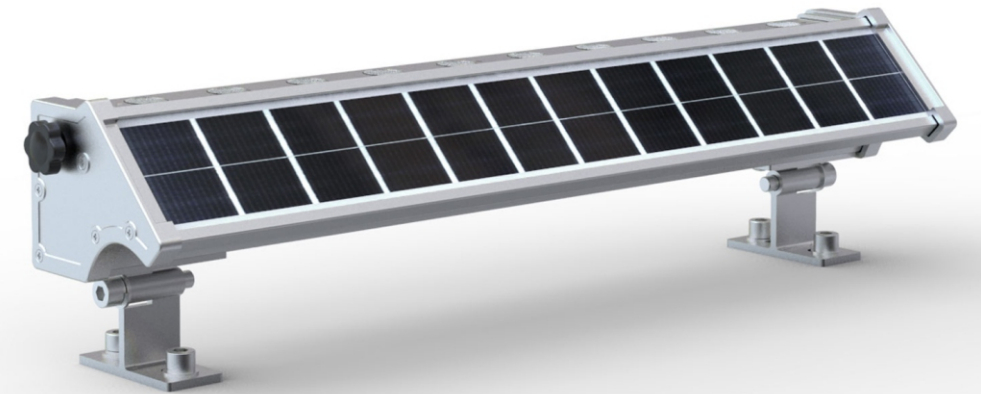

200 LUMENS

Specification	
LED	200 lumens
Solar panel	Polycrystalline Silicon
Battery Type	Rechargeable Li-ion Battery
Solar charging time	6-7 hours by bright sunlight
Lighting time	3 Nights after fully Charged
Lighting mode	5Hrs high brightness + 3 Hrs dim light
Material	Aluminum alloy + PC
Waterproof	IP65
Work temperature	Charging Temperature: 0~45° Discharging Temperature: -20°~60° Storage Temperature: 0~45°
Product size	517*108*128mm
Application	Garden,Hotel,Overpass, Bridge,Building External Wall , Yard,Square,Pathway,etc



ESL-06



Solar Step Light



Specification	
LED	20Lumens
Solar panel	Monocrystalline silicon
Battery Type	Li-ion rechargeable battery
Solar charging time	12 hours by bright sunlight
Lighting time	Over 3 nights
Lighting mode	High brightness for the hole night
Material	Aluminum+ABS
Waterproof	IP65
Work temperature	Charging Temperate: 0~45° Discharging Temperate: -20°~60° Storage Temperate: 0~45°
Product size	200*123*63mm
Application	Wall, Step, Road, Garden, Park, Square, Street , Pathway



Practical Application from Customer



More Popular Solar products, please visit www.boasolaris.com

More...